


CARPET
TILES

Tandus
Chord

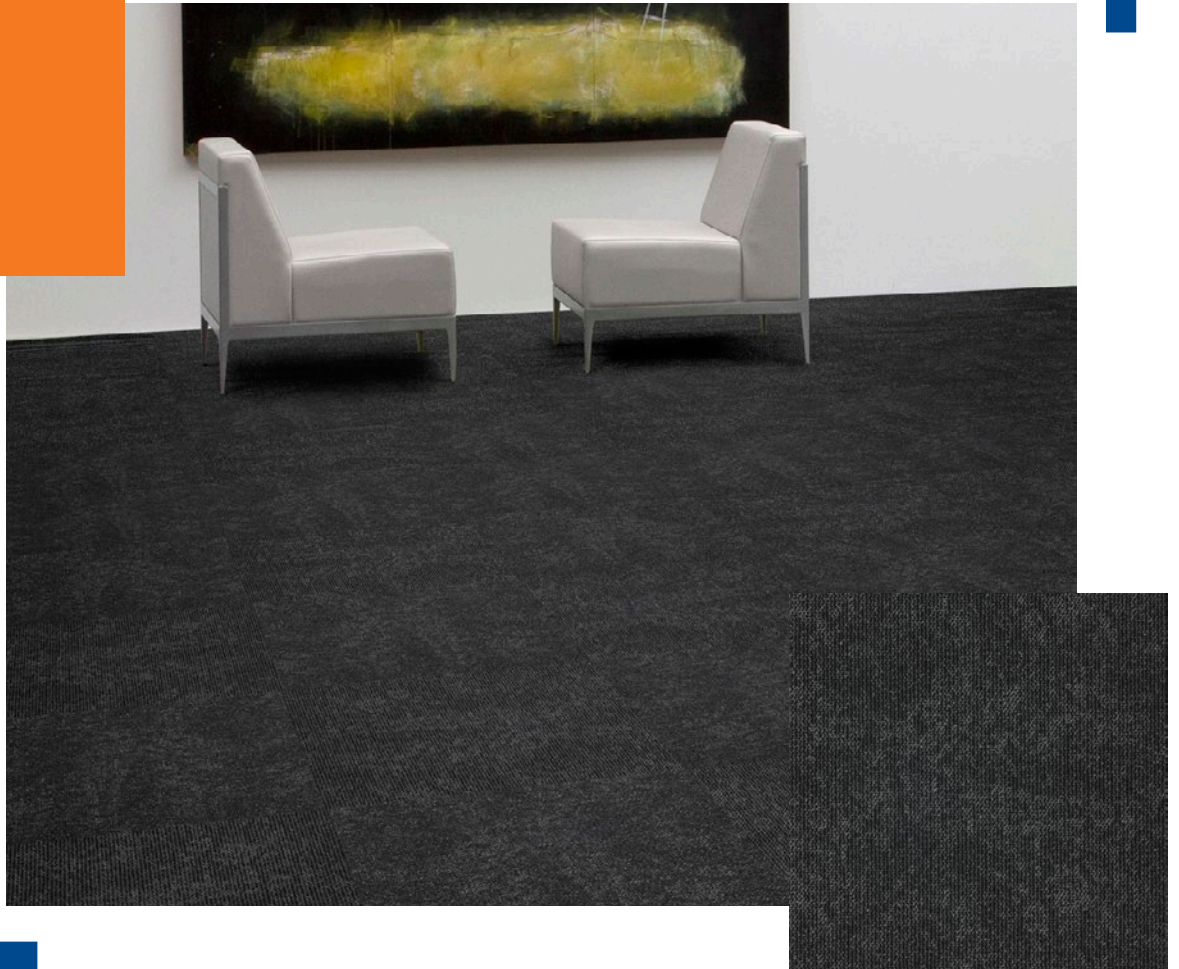

Solution dyed nylon modular carpet tiles

Tandus Carpet Tiles deliver the best combination of aesthetics, performance and sustainability.

Tandus carpet tiles come in an extensive range of colours and textures that work across a range of applications including offices, education and healthcare.



Tandus
A Tarkett Company

Product Characteristics	Standards	Tandus Chord
Product construction		Patterned Loop
Dye method		Solution Dyed
Gauge		1/12
Primary backing		Synthetic Non-Woven
Secondary backing		ECOBOND™ Recycled content Backing
Stitches/length	ASTM D-148	42.5/100mm
Total weight		3708 g/m ² ± 5%
Surface pile density	UM44D	188.1 kg/m ³
Thickness of pile above the substrate	ASTM D-418	4.5mm
Total thickness		7mm
Dimension		666.67mm x 666.67mm
Tiles per box/area		9/4m ²
Warranty		10 years

Performance Characteristics	Standards	Tandus Chord
Reaction to fire	ISO AS 9239-1	Critical radiant flux 4.9 kW/m ² Smoke 167%.min
Electrostatic properties	AATCC 134	≤ 3 kV
Colour fastness	AATCC 16E	≥ 4

Recommended specification clauses for your project

Product must be Tarkett Tandus ECOBOND™ carpet tile number 630031

1. Solution dyed Nylon carpet tile 666.67mm x 666.67mm with ECOBOND™ fiberglass reinforced backing
2. 10 year commercial manufacturer's product warranty
3. Must be installed as per manufacturer's instructions

**For information on our full range, contact us on 1300 851 484
or visit Tarkospec.com.au**

The information in this data sheet is correct at date of publication however, due to Tarkett's commitment for ongoing product improvement, we reserve the right to change this information without notice. Please note that Tarkett's instructions regarding installation, cleaning and maintenance must be observed. Please contact Tarkett for further information on these instructions.